

Heat Dump

Ancillary Range

Model



Standard Features

- Easy to clean matrix
- Simplistic design with fewer parts
- Centrally located electrical connection


Optional extras:

- Flat roof mounting bracket available


Benefits

- Simplify serviceability.
- 32% decrease in overall weight of the unit
- Improved manual handling and ergonomics
- Improved health and safety - no handling of the matrix
- Compatible with current wall mounting brackets
- Built in spirit level on wall mount bracket
- Industry standard matrix and motor
- Flexible right and left hand configuration - without handling the matrix

Ancillary Range - Heat Dump

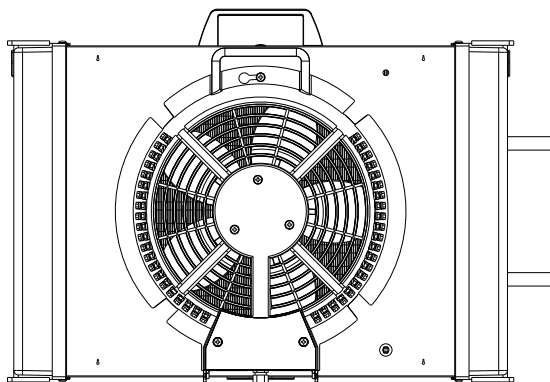

Front View

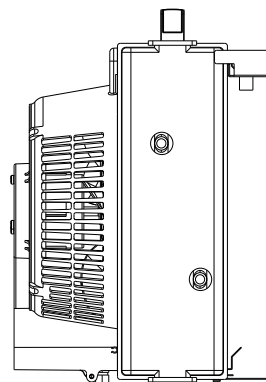

Side View (with bracket)

Model

Dimensions (H x W x D)	375 x 566 x 237(without bracket)
Dimensions (H x W x D)	375 x 566 x 290 (Inc bracket)
Weight	9 Kg
Electrical Connectors	1
Matrix	3 Pass copper aluminium
Fan Motor	24V a.c.
Glycol connections	15mm Diameter
Additional Features	<ul style="list-style-type: none"> • Simplify serviceability. • 32% decrease in overall weight reduction of the unit • Improved manual handling and ergonomics • Improved health and safety - no handling of the matrix • Compatible with current wall mounting brackets